




# ECB-600 Series & ECx-400 Series

BACnet B-AAC Programmable Controllers and I/O Extension Modules

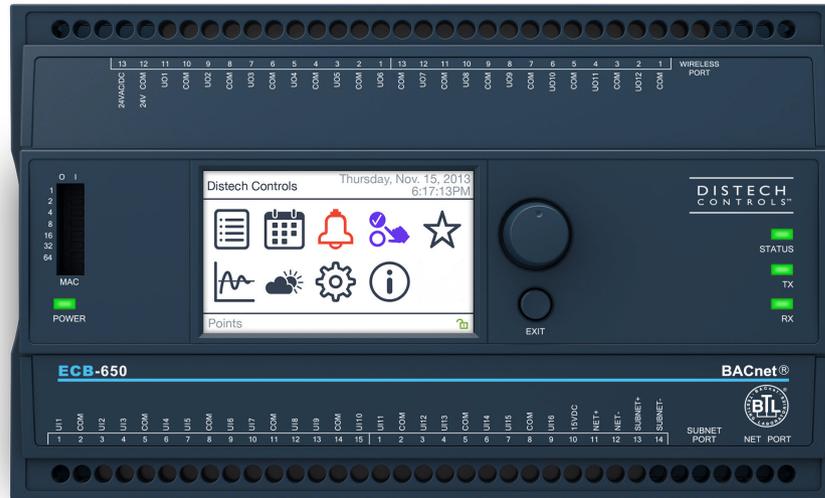

## Overview

The ECB-600 Series controllers are microprocessor-based programmable controllers designed to control various building automation applications such as air handling units, chillers, boilers, pumps, cooling towers, and central plant applications. This series supports up to two ECx-400 Series I/O extension modules.

This controller uses the BACnet® MS/TP LAN communication protocol and is BTL®-Listed as BACnet Advanced Application Controllers (B-AAC).



## Applications

These controllers meet the requirements of the following applications:

- Central Plant
- Air Handling Units
- Multi-Zone Applications
- Chillers
- Boilers
- Cooling Towers
- Roof Top Units
- Power Measurement

## Features & Benefits

### Universal Inputs and Outputs

This controller has various software configurable universal inputs and software configurable universal outputs, and covers all medium to large-size industry-standard HVAC applications.

This series supports up to two ECx-400 Series I/O extension modules that operate off of a separate sub-bus, giving this controller a total of up to 40 universal inputs and 36 universal outputs.

### Highly Accurate Universal Inputs


Highly accurate universal inputs support thermistors and resistance temperature detectors (RTDs) that range from 0 Ohms to 350,000 Ohms, as well as support for inputs requiring 0 to 10VDC or a pulse count. 0-20mA inputs and outputs have a jumper that eliminates the need for external resistors. This provides the freedom of using your preferred or engineer-specified sensors, in addition to any existing ones. The first four universal inputs support fast pulse count reading up to 50 Hz for gas, water, and electric meters and are compatible with an SO rated (optically-isolated) output.

## Rugged Inputs/Outputs

Rugged hardware inputs and outputs eliminate need for external protection components, such as diodes for 12V DC relays.

## Programmability

Supports Distech Controls' EC-*gfx*Program, which makes Building Automation System (BAS) programming effortless by allowing you to visually assemble building blocks together to create a custom control sequence for any HVAC / building automation application.

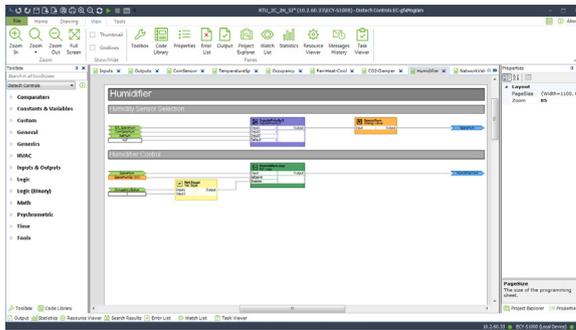

## Increased Energy Efficiency

Improves energy efficiency when combined with:

- CO<sub>2</sub> sensors as part of a demand-controlled ventilation strategy that adjusts the amount of fresh air intake according to the number of building occupants
- Variable-frequency drives to adjust motor speed according to the instantaneous demand of the application.

## Open-to-Wireless™ Solution



The controllers are Open-to-Wireless™ ready, and when paired with the Wireless Receiver, work with a variety of wireless battery-less sensors and switches, to reduce the cost of installation and minimize the impact on existing partition walls. For supported frequencies in your area, refer to the [Open-to-Wireless Solution Guide](#).

Available with an optional Wireless Receiver that supports up to 28 wireless inputs to create wire-free installations.

## HOA Switches & Potentiometers

Certain models have the convenience of supervised Hand-Off-Auto (HOA) switches and potentiometers that provide feedback on an operator's manual override of an output to the controller's code. HOA switches are ideal for testing purposes or when performing equipment commissioning and maintenance.

## Allure™ Series Communicating Sensor Support

These controllers work with a wide range of sensors, such as the Allure Series Communicating Sensors that are designed to provide intelligent sensing and control devices for increased user experience and energy efficiency.


- Allure EC-Smart-Vue sensors feature a backlit-display and graphical menus that provide precise environmental zone control, with any combination of the following: temperature, humidity, CO<sub>2</sub>, and motion sensor.
- Allure EC-Smart-Comfort sensors feature colored LED indicators to provide user feedback, rotary knobs to adjust the setpoint offset and fan speed, and an occupancy override push button. This sensor can also be expanded with a combination of up to 4 add-on push button modules for lighting and shade/ sunblind control.
- Allure EC-Smart-Air sensors combine precise environmental sensing in a discreet and alluring enclosure for temperature, humidity, and CO<sub>2</sub>.



## Operator Interface

The ECB-650 model has a full-color backlit-display and a jog dial for turn and select navigation to access a wide range of internal controller functions:

- View and override values. The status is color coded to show if the value is overridden.
- Visually tune PID loops with system response graphing.
- View active alarm list including details and acknowledge alarms.
- View and modify schedules and calendars through a graphic interface. Also create or delete schedule events, special events, and calendar entries.
- Create a list of favorites to provide quick access to commonly-used values.
- Multi-User access management.
- Multilingual interface: English, French, German, etc.

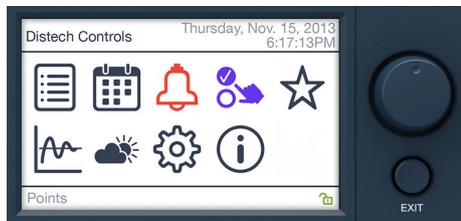

## UUKL Smoke Control System

The Distech Controls UUKL Smoke Control System is designed to protect occupants and buildings in the event of a building fire by maintaining tenable evacuation routes and containing smoke within the fire area. It is a unique Niagara<sup>AX</sup>-based system that complies with the Underwriters Laboratories Inc<sup>®</sup> (UL) requirements for UL 864 UUKL 9<sup>th</sup> Edition Smoke Control Listing.

For detailed specifications, requirements, and procedures for installing, wiring, and operating UUKL Listed equipment, refer to the Distech Controls UUKL Listed documentation on SmartSource: Smoke Control Design Guide (05DI-UGULDES-10) and the Smoke Control Application Guide (05DI-UGULAPP-10).

## Model Selection

				
Model	ECB-600	ECB-610	ECB-650	ECB-600 UUKL
Points	28-Point Controller	28-Point Controller with HOA	28-Point Controller	28-Point Controller
Universal hardware inputs	16	16	16	16
Wireless inputs <sup>1</sup>	28	28	28	28
15 Vdc Power Supply	■	■	■	■
Universal outputs	12	12	12	12
HOA switch & potentiometer		■		
Operator interface: interactive color display to monitor and override controller parameters			■	
Number of ECx Modules Supported	2	2	2	2
UL 864, 9th Edition, UUKL Listed Smoke Control Equipment <sup>2</sup>				■
California State Fire Marshal Listed				■

1. All controllers are Open-to-Wireless ready. Available when an optional Wireless Receiver is connected to the controller. Some wireless sensors may use more than one wireless input from the controller.
2. The UL 864 UUKL Listed Smoke Control Equipment is used only in Distech Controls' UUKL smoke control system. For detailed specifications, requirements and procedures for installing and operating UUKL Listed equipment refer to the Distech Controls' UUKL Smoke Control documentation on SmartSource.

## Recommended Applications

Model	ECB-600	ECB-610	ECB-650	ECB-600 UUKL
Air Handling Units	■	■	■	■
Multi-Zone Application	■	■	■	
Chiller	■	■	■	
Boiler	■	■	■	
Cooling Tower	■	■	■	
Central Plant	■	■	■	
Exhaust Fan				■

## BACnet Objects List

BACnet Objects List	
BACnet Calendar Objects	2
<input type="checkbox"/> Events per calendar	45
BACnet Schedule Objects	10
<input type="checkbox"/> Special events per schedule	10
BACnet PID Loop Objects	40
BACnet Input Objects (AI, BI, MSI) <sup>1</sup>	68 <sup>2</sup>
BACnet Output Objects (AO, BO) <sup>1</sup>	12 <sup>3</sup>
BACnet BV Objects:	
<input type="checkbox"/> Commandable <sup>1</sup>	20
<input type="checkbox"/> Non-Commandable	55
BACnet MSV Objects:	
<input type="checkbox"/> Commandable <sup>1</sup>	20
<input type="checkbox"/> Non-Commandable	55
BACnet AV Objects:	
<input type="checkbox"/> Commandable <sup>1</sup>	35
<input type="checkbox"/> Non-Commandable	115
BACnet Alarm Notification Classes	5

1. Supports object internally-generated alarms (intrinsic reporting) which are dynamically instantiated upon object creation.

2. This consists of Hardware Inputs, Allure Series Communicating Sensor Inputs, and Open-to-Wireless Inputs. Each ECx-400, ECx-410 or ECx-420 adds 12 input objects.

3. This consists of Hardware Outputs. Each ECx-400 or ECx-410 adds 12 output objects.

## ECx-400 Series I/O Extension Modules

				
Model	ECx-400	ECx-410	ECx-420	ECx-400 UUKL
Additional points	24-Point I/O Extension Module	24-Point I/O Extension Module	12-Point I/O Extension Module	24-Point I/O Extension Module
Universal hardware inputs	12	12	12	12
15 Vdc Power Supply	■	■	■	■
Universal outputs	12	12	0	12
HOA switch		■		
UL 864, 9 <sup>th</sup> Edition, UUKL Listed Smoke Control Equipment <sup>1</sup>				■
California State Fire Marshal Listed				■

1. The UL 864 UUKL Listed Smoke Control Equipment is used only in Distech Controls' UUKL smoke control system. For detailed specifications, requirements and procedures for installing and operating UUKL Listed equipment refer to the Distech Controls' UUKL Smoke Control documentation on SmartSource.

## ECx-400 Series BACnet Objects List

Model	ECx-400	ECx-410	ECx-420
BACnet Input Objects (AI, BI, MSI) <sup>1</sup>	12 <sup>2,4</sup>	12 <sup>2,4</sup>	12 <sup>2,4</sup>
BACnet Output Objects (AO, BO) <sup>1</sup>	12 <sup>3,4</sup>	12 <sup>3,4</sup>	
BACnet Alarm Notification Classes <sup>4</sup>	5	5	5

1. Supports object internally-generated alarms (intrinsic reporting).
2. This consists of Hardware Inputs.
3. This consists of Hardware Outputs.
4. Objects are in the connected ECB-600, ECB-610, or ECB-650 controller (master)

# Product Specifications

## Power Supply Input

Voltage Range 24VAC/DC;  $\pm 15\%$ ; Class 2

Frequency Range 50/60Hz

Overcurrent Protection Field replaceable fuse

Fuse Type 3.0A

### Power Consumption:

ECB-600/ECB-610 22 VA typical plus all external loads<sup>1</sup>, 65 VA max.

ECB-650 25 VA typical plus all external loads<sup>1</sup>, 68 VA max.

1. External loads must include the power consumption of any connected modules such as an Allure Series Communicating Sensor. Refer to the respective module's datasheet for related power consumption information.

## Communications

Communication Bus BACnet MS/TP

BACnet Profile B-AAC<sup>1</sup>

EOL Resistor Built-in, jumper selectable

Baud Rates 9600, 19 200, 38 400, or 76 800 bps

Addressing Dip switch or with an Allure EC-Smart-View Series Communicating Sensor

1. Refer to Distech Controls' Protocol Implementation Conformity Statement for BACnet.

## Hardware

Processor STM32 (ARM Cortex™ M3) MCU, 32 bit

CPU Speed 72 MHz

Memory 1 MB Non-volatile Flash (applications)

2 MB Non-volatile Flash (storage)

96 kB RAM

Real Time Clock (RTC) Built-in Real Time Clock with rechargeable battery

Network time synchronization is initially required

RTC Battery 20 hours charge time, 20 days recharge time

Up to 500 charge/discharge cycles

Status Indicator Green LEDs: power status & LAN Tx

Orange LEDs: controller status & LAN Rx

Communication Jack BACnet 1/8" (3.5mm) stereo audio jack

## Subnetwork

Communication RS-485

Cable Cat 5e, 8 conductor twisted pair

Connector RJ-45

Connection Topology Daisy-chain

Maximum number of supported devices per controller combined 12

Allure EC-Smart-View Series Up to 12<sup>1</sup>

Allure EC-Smart-Comfort Series (not supported by UUKL) Up to 6

Allure EC-Smart-Air Series (not supported by UUKL) Up to 6<sup>1</sup>

1. A controller can support a maximum of two Allure Series Communicating Sensor models equipped with a CO<sub>2</sub> sensor. The remaining connected Allure Series Communicating Sensor models must be without a CO<sub>2</sub> sensor.

## I/O Extension Modules (ECx-400 Series)

Communication \_\_\_\_\_ RS-485  
 Number of I/O extensions modules per controller \_\_\_\_\_ Up to 2, in daisy-chain configuration

### Wireless Receiver<sup>1</sup>

Communication Protocol \_\_\_\_\_ EnOcean wireless standard  
 Number of Wireless Inputs<sup>2</sup> \_\_\_\_\_ 28  
 Supported Wireless Receivers \_\_\_\_\_ Refer to the Open-to-Wireless Solution Guide  
 Cable \_\_\_\_\_ Telephone cord  
 Connector \_\_\_\_\_ 4P4C modular jack  
 Length (maximum) \_\_\_\_\_ 6.5ft (2m)




1. Available when an optional external Wireless Receiver module is connected to the controller. Refer to the Open-to-Wireless Solution Guide for a list of supported EnOcean wireless modules.
2. Some wireless modules may use more than one wireless input from the controller.

## Mechanical

Dimensions (H × W × D):

- ECB-600/ECB-610 \_\_\_\_\_ 4.7 × 7.7 × 2.03" (119.38 × 195.58 × 51.47 mm)
- ECB-650 \_\_\_\_\_ 4.7 × 7.7 × 2.55" (119.38 × 195.58 × 64.68 mm)

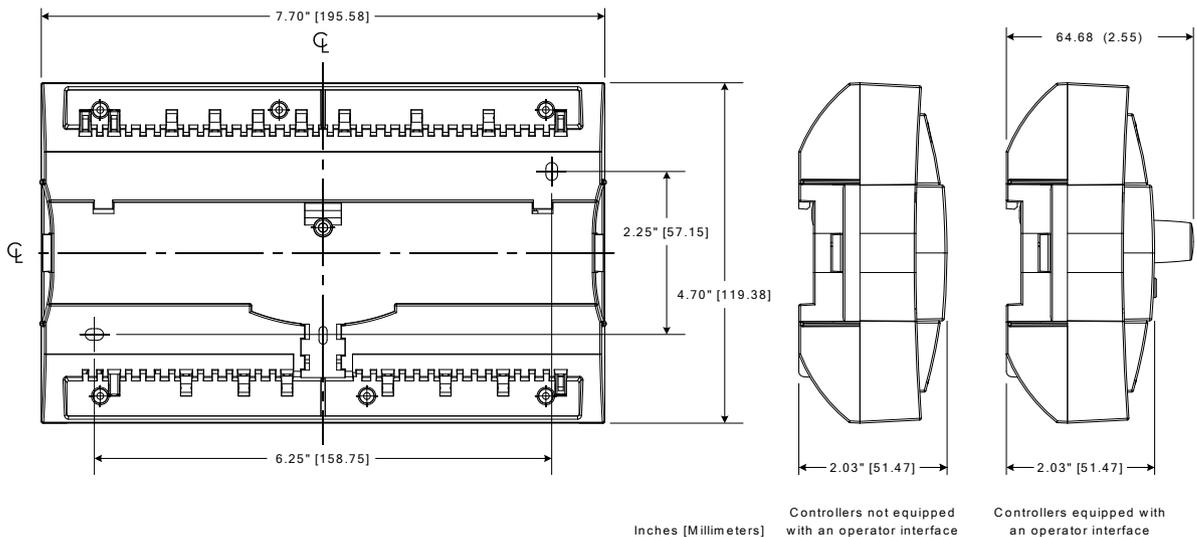

Shipping Weight:

- ECB-600/ECB-610 \_\_\_\_\_ 1.17lbs (0.53 kg)
- ECB-650 \_\_\_\_\_ 1.28lbs (0.58 kg)

Enclosure Material<sup>1</sup> \_\_\_\_\_ FR/ABS

Enclosure Rating \_\_\_\_\_ Plastic housing, UL94-5VB flammability rating  
 Plenum rating per UL1995

Color \_\_\_\_\_ Black & blue casing & grey connectors

Installation \_\_\_\_\_ Direct DIN-rail mounting or wall mounting  
 through mounting holes (see figure above for hole positions)

1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

## Environmental

Operating Temperature ————— 32°F to 122°F (0°C to 50°C)

Storage Temperature ————— -4°F to 122°F (-20°C to 50°C)

Relative Humidity ————— 0 to 90% Non-condensing

## Standards and Regulations

CE:

Emission ————— EN61000-6-3: 2007; A1:2011; Generic standards for residential, commercial and light-industrial environments

Immunity ————— EN61000-6-1: 2007; Generic standards for residential, commercial and light-industrial environments

FCC ————— This device complies with FCC rules part 15, subpart B, class B

UL Listed (CDN & US) ————— UL916 Energy management equipment

UL 864 ————— UL 864, 9<sup>th</sup> Edition, UUKL Listed Smoke Control Equipment  
(ECB-600 UUKL model only)<sup>1</sup>

California State Fire Marshal Listing ————— CSFM: 7300-2187:0100  
(ECB-600 UUKL model only)<sup>1</sup>

CEC Appliance Database ————— Appliance Efficiency Program<sup>2</sup>

1. For detailed specifications regarding the ECB-600 UUKL model, refer to the Distech Controls UUKL Smoke Control Design Guide.

2. California Energy Commission's Appliance Efficiency Program: The manufacturer has certified this product to the California Energy Commission in accordance with California law.



## ECB-650 Display

Display Type ————— Backlit-color LCD

Display Resolution ————— 400 W x 240 H pixels (WQVGA)

Effective Viewing Area (W × H) ————— 2.4 × 1.4" (61.2 × 36.7mm)  
2.8" (71mm) diagonal

Menu Navigation ————— Jog dial turn, select navigation with Exit button

## Specifications - Universal Inputs (UI)

### General

Input Type ————— Universal; software configurable

Input Resolution ————— 16-bit analog / digital converter

Power Supply Output ————— 15VDC; maximum 320mA

### Contact

Type ————— Dry contact

### Counter

UI1 to UI4:

Type ————— SO output compatible

Maximum Frequency ————— 50Hz maximum,

Minimum Duty Cycle ————— 10milliseconds On / 10milliseconds Off

UI5 to UI10:

Type \_\_\_\_\_ Dry contact

Maximum Frequency \_\_\_\_\_ 1Hz maximum,

Minimum Duty Cycle \_\_\_\_\_ 500milliseconds On / 500milliseconds Off

### 0 to 10VDC

Range \_\_\_\_\_ 0 to 10VDC (40k $\Omega$  input impedance)

### 0 to 5VDC

Range \_\_\_\_\_ 0 to 5VDC (high input impedance)

### 0 to 20mA

Range \_\_\_\_\_ 0 to 20mA

\_\_\_\_\_ 249 $\Omega$  jumper configurable internal resistor

### Resistance/Thermistor

Range \_\_\_\_\_ 0 to 350 K $\Omega$

Supported Thermistor Types \_\_\_\_\_ Any that operate in this range

Pre-configured Temperature Sensor Types:

Thermistor \_\_\_\_\_ 10K $\Omega$  Type 2, 3 (10K $\Omega$  @ 77°F; 25°C)

Platinum \_\_\_\_\_ Pt1000 (1K $\Omega$  @ 32°F; 0°C)

Nickel \_\_\_\_\_ RTD Ni1000 (1K $\Omega$  @ 32°F; 0°C)

\_\_\_\_\_ RTD Ni1000 (1K $\Omega$  @ 69.8°F; 21°C)

## Specifications - Universal Outputs (UO)

### General

Output Type \_\_\_\_\_ Universal; software configurable

Output Resolution \_\_\_\_\_ 10-bit digital to analog Converter

Output Protection \_\_\_\_\_ Built-in snubbing diode to protect against back-EMF,  
for example when used with a 12VDC relay  
Output is internally protected against short circuits

Load Resistance \_\_\_\_\_ Minimum 200  $\Omega$  for 0-10VDC and 0-12VDC outputs

\_\_\_\_\_ Maximum 500  $\Omega$  for 0-20mA output

Auto-reset fuse \_\_\_\_\_ Provides 24VAC over voltage protection

### 0 or 12VDC (On/Off)

Range \_\_\_\_\_ 0 or 12VDC

Source Current \_\_\_\_\_ Maximum 60 mA at 12VDC (minimum load resistance 200 $\Omega$ )

### PWM

Range \_\_\_\_\_ Adjustable period from 2 to 65seconds

Thermal Actuator Management \_\_\_\_\_ Adjustable warm up and cool down time

### Floating

Minimum Pulse On/Off Time \_\_\_\_\_ 500milliseconds

Drive Time Period \_\_\_\_\_ Adjustable

## 0 to 10VDC

Voltage Range \_\_\_\_\_ 0 to 10VDC linear

Source Current \_\_\_\_\_ Maximum 60 mA at 10VDC (minimum load resistance 200  $\Omega$ )

## 0 to 20mA

Range \_\_\_\_\_ 0 to 20mA

Type \_\_\_\_\_ Current source (jumper configurable)

## HOA

Hand-Off-Auto switch \_\_\_\_\_ When equipped

\_\_\_\_\_ Supervision allows control logic to read the current

HOA switch and potentiometer settings

Threshold \_\_\_\_\_ Configurable

Potentiometer Voltage Range \_\_\_\_\_ 0 to 12.5VDC

# Product Specifications- ECx-400 Series

## Power Supply Input

Voltage Range \_\_\_\_\_ 24VAC/DC;  $\pm 15\%$ ; Class 2

Frequency Range \_\_\_\_\_ 50/60Hz

Overcurrent Protection \_\_\_\_\_ Field replaceable fuse

Fuse Type \_\_\_\_\_ 3.0A

### Power Consumption:

ECx-400/ECx-410 \_\_\_\_\_ 22 VA typical plus all external loads, 50 VA max.

ECx-420 \_\_\_\_\_ 10 VA typical, 16 VA max.

## Communication

Communication Bus \_\_\_\_\_ RS-485

Baud Rates \_\_\_\_\_ 38 400 bps

Addressing \_\_\_\_\_ Dip Switch

## Hardware

Processor \_\_\_\_\_ STM32 (ARM Cortex™ M3) MCU, 32 bit

CPU Speed \_\_\_\_\_ 64 MHz

Memory \_\_\_\_\_ 64 kB Non-volatile Flash (applications and storage)

\_\_\_\_\_ 20 kB RAM


Status Indicator \_\_\_\_\_ Green LEDs: power status & LAN Tx

\_\_\_\_\_ Orange LEDs: controller status & LAN Rx

## Mechanical

### Dimensions:

With Screws \_\_\_\_\_ 4.7 × 7.7 × 2.03" (119.38 × 195.58 × 51.47mm)

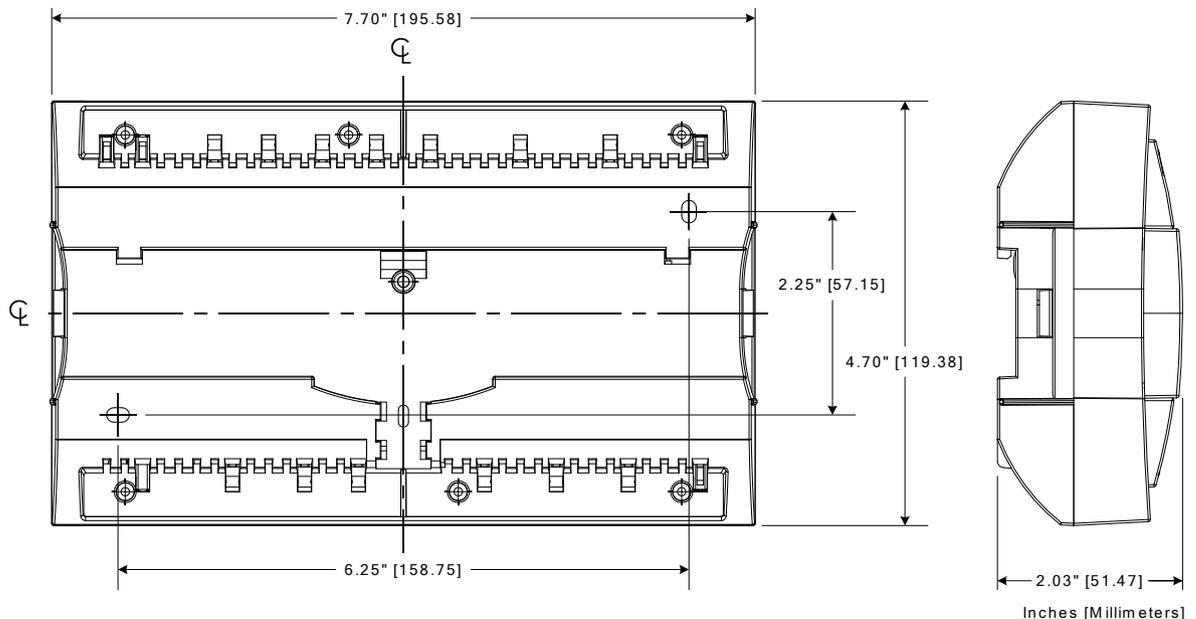

Shipping Weight \_\_\_\_\_ 1.17lbs (0.53kg)

Enclosure Material<sup>1</sup> \_\_\_\_\_ FR/ABS

Enclosure Rating \_\_\_\_\_ Plastic housing, UL94-5VB flammability rating  
Plenum rating per UL1995

Color \_\_\_\_\_ Black & blue casing & grey connectors

Installation \_\_\_\_\_ Direct DIN-rail mounting or wall mounting  
through mounting holes (see figure above for hole positions)

1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

## Environmental

Operating Temperature \_\_\_\_\_ 32°F to 122°F (0°C to 50°C)

Storage Temperature \_\_\_\_\_ -4°F to 122°F (-20°C to 50°C)

Relative Humidity \_\_\_\_\_ 0 to 90% Non-condensing

## Standards and Regulations

CE:

Emission \_\_\_\_\_ EN61000-6-3: 2007; A1:2011; Generic standards for residential, commercial and light-industrial environments

Immunity \_\_\_\_\_ EN61000-6-1: 2007; Generic standards for residential, commercial and light-industrial environments

FCC \_\_\_\_\_ This device complies with FCC rules part 15, subpart B, class B

UL Listed (CDN & US) \_\_\_\_\_ UL916 Energy management equipment

UL 864 \_\_\_\_\_ UL 864, 9<sup>th</sup> Edition, UUKL Listed Smoke Control Equipment  
(ECx-400 UUKL model only)<sup>1</sup>

California State Fire Marshal Listing \_\_\_\_\_ CSFM: 7300-2187:0100  
(ECx-400 UUKL model only)<sup>1</sup>

1. For detailed specifications regarding the ECx-400 UUKL model, refer to the Distech Controls UUKL Smoke Control Design Guide.



# Specifications - Universal Inputs (UI)

## General

Input Type — Universal; software configurable  
Input Resolution — 16-bit analog / digital converter  
Power Supply Output — 15VDC; maximum 240mA

## Contact

Type — Dry contact

## Counter

Type — Dry contact  
Maximum Frequency — 1Hz maximum,  
Minimum Duty Cycle — 500milliseconds On / 500milliseconds Off

## 0 to 10VDC

Range — 0 to 10VDC (40k $\Omega$  input impedance)

## 0 to 5VDC

Range — 0 to 5VDC (high input impedance)

## 0 to 20mA

Range — 0 to 20mA  
249 $\Omega$  external resistor wired in parallel

## Resistance/Thermistor

Range — 0 to 350 K $\Omega$

Supported Thermistor Types — Any that operate in this range

Pre-configured Temperature Sensor Types:

- Thermistor — 10K $\Omega$  Type 2, 3 (10K $\Omega$  @ 77°F; 25°C)
- Platinum — Pt1000 (1K $\Omega$  @ 32°F; 0°C)
- Nickel — RTD Ni1000 (1K $\Omega$  @ 32°F; 0°C)  
RTD Ni1000 (1K $\Omega$  @ 69.8°F; 21°C)

# Specifications - Universal Outputs (UO)

## General

Output Type — Universal; software configurable  
Output Resolution — 10-bit digital to analog Converter  
Output Protection — Built-in snubbing diode to protect against back-EMF,  
for example when used with a 12VDC relay  
Output is internally protected against short circuits  
Load Resistance — Minimum 200  $\Omega$  for 0-10VDC and 0-12VDC outputs  
— Maximum 500  $\Omega$  for 0-20mA output  
Auto-reset fuse — Provides 24VAC over voltage protection

## 0 or 12VDC (On/Off)

Range — 0 or 12VDC  
Source Current — Maximum 60 mA at 12VDC (minimum load resistance 200 $\Omega$ )

## PWM

Range — Adjustable period from 2 to 65seconds  
Thermal Actuator Management — Adjustable warm up and cool down time

## Floating

Minimum Pulse On/Off Time — 500milliseconds  
Drive Time Period — Adjustable

## 0 to 10VDC

Voltage Range — 0 to 10VDC linear  
Source Current — Maximum 60 mA at 10VDC (minimum load resistance 200  $\Omega$ )

## 0 to 20mA

Range — 0 to 20mA  
Type — Current source (jumper configurable)

## HOA

Hand-Off-Auto switch — When equipped  
— Supervision allows control logic to read the current  
HOA switch and potentiometer settings  
Threshold — Configurable  
Potentiometer Voltage Range — 0 to 12.5VDC

Specifications subject to change without notice.

Distech Controls, the Distech Controls logo, Innovative Solutions for Greener Buildings, Allure, ECO-Vue, and Open-To-Wireless are trademarks of Distech Controls Inc.; LonWorks, LON, and LNS are registered trademarks of Echelon Corporation; BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association; NiagaraAX Framework is a registered trademark of Tridium, Inc.; EnOcean is a registered trademark of EnOcean GmbH. All other trademarks are property of their respective owners.

©, Distech Controls Inc., 2015. All rights reserved.

