


ECL-600 Series & ECx-400 Series

LONMARK® Certified Programmable Controllers and I/O Extension Modules

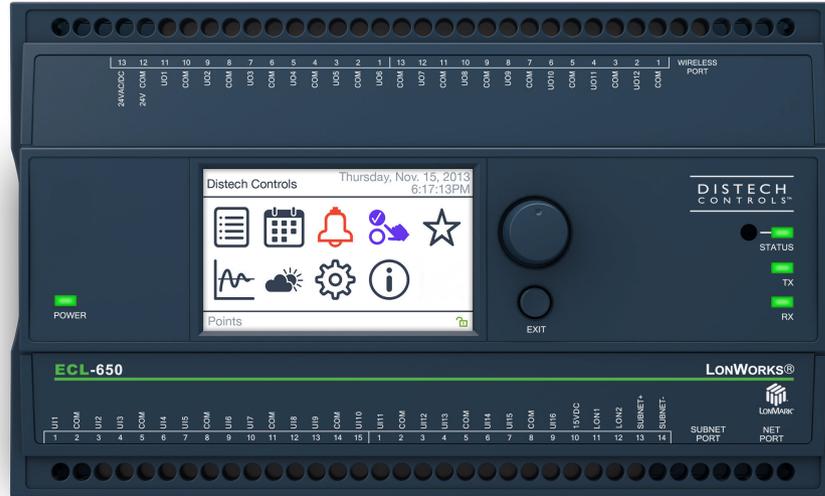

Overview

The ECL-600 Series controllers are microprocessor-based programmable controllers designed to control various building automation applications such as air handling units, chillers, boilers, pumps, cooling towers, and central plant applications. This series supports up to two ECx-400 Series I/O extension modules.

These controllers use the LonTalk® communication protocol and are LONMARK certified as a Static Programmable Device, guaranteeing compatibility and interoperability with other manufacturers' LONMARK certified controllers.



Applications

These controllers meet the requirements of the following applications:

- Central Plant
- Air Handling Units
- Multi-Zone Applications
- Chillers
- Boilers
- Cooling Towers
- Roof Top Units
- Power Measurement

Features & Benefits

Universal Inputs and Outputs

This controller has various software configurable universal inputs and software configurable universal outputs, and covers all medium to large-size industry-standard HVAC applications.

This series supports up to two ECx-400 Series I/O extension modules that operate off of a separate sub-bus, giving this controller a total of up to 40 universal inputs and 36 universal outputs.


Highly Accurate Universal Inputs

Highly accurate universal inputs support thermistors and resistance temperature detectors (RTDs) that range from 0 Ohms to 350,000 Ohms, as well as support for inputs requiring 0 to 10VDC or a pulse count. 0-20mA inputs and outputs have a jumper that eliminates the need for external resistors. This provides the freedom of using your preferred or engineer-specified sensors, in addition to any existing ones. The first four universal inputs support fast pulse count reading up to 50 Hz for gas, water, and electric meters and are compatible with an SO rated (optically-isolated) output.

Operator Interface

The ECL-650 model has a full-color backlit-display and a jog dial for turn and select navigation to access a wide range of internal controller functions:

- View and override values. The status is color coded to show if the value is overridden.
- Visually tune PID loops with system response graphing.
- View active alarm list.
- View and modify schedules and calendars through a graphic interface. Also create or delete schedule events, special events, and calendar entries.
- Create a list of favorites to provide quick access to commonly-used values.
- Multi-User access management.
- Multilingual interface: English, French, German, etc.

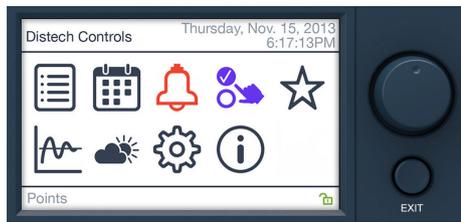

Model Selection

			
Model	ECL-600	ECL-610	ECL-650
Points	28-Point Controller	28-Point Controller with HOA	28-Point Controller
Universal hardware inputs	16	16	16
Wireless inputs ¹	28	28	28
15 Vdc Power Supply	■	■	■
Universal outputs	12	12	12
HOA switch & potentiometer		■	
Operator interface: interactive color display to monitor and override controller parameters			■
Number of ECx Modules Supported	2	2	2

1. All controllers are Open-to-Wireless ready. Available when an optional Wireless Receiver is connected to the controller. Some wireless sensors may use more than one wireless input from the controller.

Recommended Applications

Model	ECL-600	ECL-610	ECL-650
Air Handling Units	■	■	■
Multi-Zone Application	■	■	■
Chiller	■	■	■
Boiler	■	■	■
Cooling Tower	■	■	■
Central Plant	■	■	■

Objects List

Objects List	
Calendar Objects	2
<input type="checkbox"/> Special events per calendar	50
Schedule Objects	8
<input type="checkbox"/> Special events per schedule	10
PID Loop Objects	30
Constants:	
<input type="checkbox"/> Boolean	124
<input type="checkbox"/> Enumeration	62
<input type="checkbox"/> Numeric	56
Variables:	
<input type="checkbox"/> Boolean	124
<input type="checkbox"/> Enumeration	54
<input type="checkbox"/> Numeric	56
nciSetpoint	■
Total Network Variables	254
Network Variable Input (General Usage):	
<input type="checkbox"/> NVI Changeable Type, Up to 31 Bytes ¹	35
Network Variable Output (General Usage):	
<input type="checkbox"/> NVO Changeable Type, Up to 31 Bytes	35
Hardware Input Network Variable:	
<input type="checkbox"/> nvoHwInput per Hardware Input	■
Hardware Output Network Variable:	
<input type="checkbox"/> nviHwInput per Hardware Output	■
<input type="checkbox"/> nvoHwInput per Hardware Output	■

1. Any type of Fan-In function is supported in combination with the "FOR" loop function.

ECx-400 Series I/O Extension Modules


			
Model	ECx-400	ECx-410	ECx-420
Additional points	24-Point I/O Extension Module	24-Point I/O Extension Module	12-Point I/O Extension Module
Universal hardware inputs	12	12	12
15 Vdc Power Supply	■	■	■
Universal outputs	12	12	0
HOA switch		■	

ECx-400 Series Objects List

Model	ECx-400	ECx-410	ECx-420
Hardware Input Network Variable:			
<input type="checkbox"/> nvoHwInput per Hardware Input	■	■	■
Hardware Input Network Variable:			
<input type="checkbox"/> nviHwOutput per Hardware Output ¹	■	■	■
<input type="checkbox"/> nvoHwOutput per Hardware Output ¹	■	■	■

1. These Network Variables are managed by the ECL-600, ECL-610, or ECL-650 controller (master).

Functional Profile

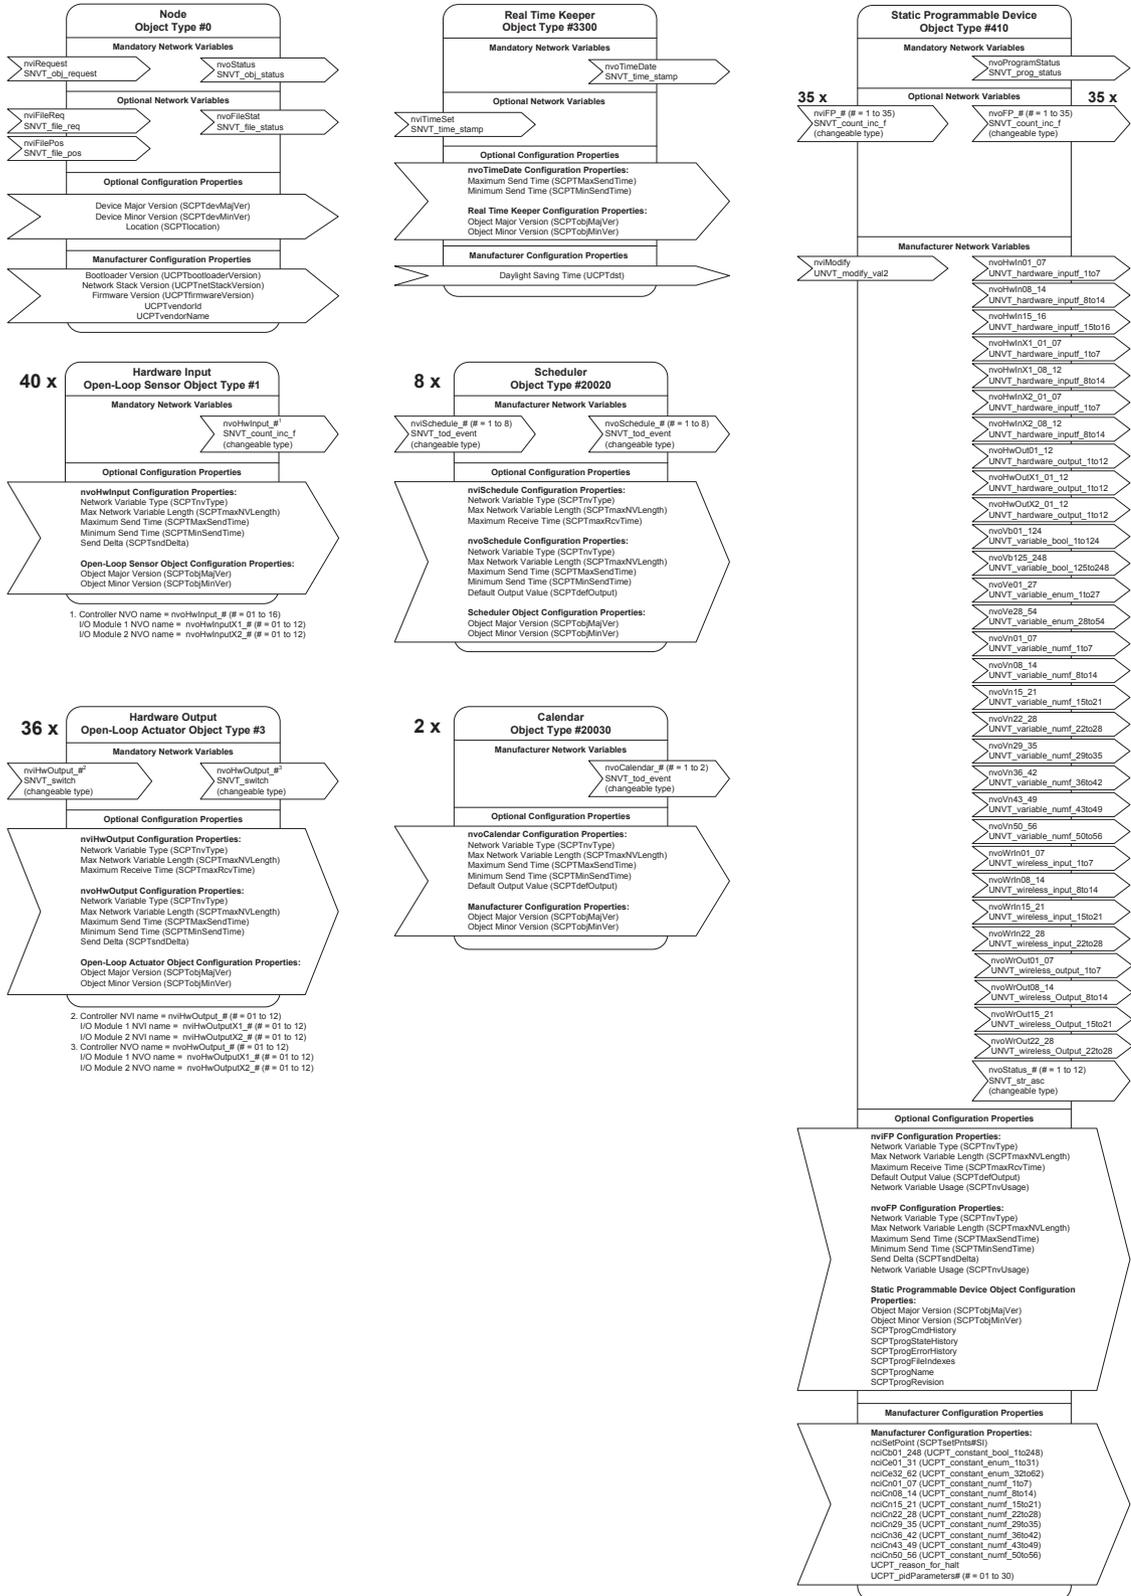

Product Specifications - ECL-600 Series

Power Supply Input

Voltage Range _____ 24VAC/DC; $\pm 15\%$; Class 2

Frequency Range _____ 50/60Hz

Overcurrent Protection _____ Field replaceable fuse

Fuse Type _____ 3.0A

Power Consumption:

ECL-600/ECL-610 _____ 22 VA typical plus all external loads¹, 65 VA max.

ECL-650 _____ 25 VA typical plus all external loads¹, 68 VA max.

1. External loads must include the power consumption of any connected modules such as an Allure Series Communicating Sensor. Refer to the respective module's datasheet for related power consumption information.

Communications

Communication _____ LonTalk Protocol

Transceiver _____ FT 5000 Free Topology Smart Transceiver

Channel _____ TP/FT-10; 78Kbps

LonMark Interoperability Guidelines _____ Version 3.4

Device Class _____ Static Programmable Device

LonMark Functional Profile :

Input Objects _____ Open-Loop Sensor #1

Output Objects _____ Open-Loop Actuator #3

Node Object _____ Node Object #0

Real Time Clock _____ Real Time Keeper #3300

Scheduler _____ Scheduler #20020

Calendar _____ Calendar #20030

Programmable Device _____ Static Programmable Device #410

Hardware

Processor _____ STM32 (ARM Cortex™ M3) MCU, 32 bit

CPU Speed _____ 72 MHz

Memory _____ 1 MB Non-volatile Flash (applications)

_____ 2 MB Non-volatile Flash (storage)

_____ 96 kB RAM

Real Time Clock (RTC) _____ Built-in Real Time Clock with rechargeable battery

_____ Network time synchronization is initially required

RTC Battery _____ 20 hours charge time, 20 days recharge time

_____ Up to 500 charge/discharge cycles

Status Indicator _____ Green LEDs: power status & LAN Tx

_____ Orange LEDs: controller status & LAN Rx

Communication Jack _____ LON® audio jack

Subnetwork

Communication	RS-485
Cable	Cat 5e, 8 conductor twisted pair
Connector	RJ-45
Connection Topology	Daisy-chain
Maximum number of supported devices per controller combined	12
<input type="checkbox"/> Allure EC-Smart-Vue Series	Up to 12 ¹
<input type="checkbox"/> Allure EC-Smart-Comfort Series	Up to 6
<input type="checkbox"/> Allure EC-Smart-Air Series	Up to 6 ¹

1. A controller can support a maximum of two Allure Series Communicating Sensor models equipped with a CO₂ sensor. The remaining connected Allure Series Communicating Sensor models must be without a CO₂ sensor.

I/O Extension Modules (ECx-400 Series)

Communication	RS-485
Number of I/O extensions modules per controller	Up to 2, in daisy-chain configuration

Wireless Receiver¹

Communication Protocol	EnOcean wireless standard
Number of Wireless Inputs ²	28
Supported Wireless Receivers	Refer to the Open-to-Wireless Solution Guide
Cable	Telephone cord
<input type="checkbox"/> Connector	4P4C modular jack
<input type="checkbox"/> Length (maximum)	6.5ft (2m)




enocean

1. Available when an optional external Wireless Receiver module is connected to the controller. Refer to the Open-to-Wireless Solution Guide for a list of supported EnOcean wireless modules.
2. Some wireless modules may use more than one wireless input from the controller.

Mechanical

Dimensions (H × W × D):

- | | |
|--|--|
| <input type="checkbox"/> ECL-600/ECL-610 | 4.7 × 7.7 × 2.03" (119.38 × 195.58 × 51.47 mm) |
| <input type="checkbox"/> ECL-650 | 4.7 × 7.7 × 2.55" (119.38 × 195.58 × 64.68 mm) |

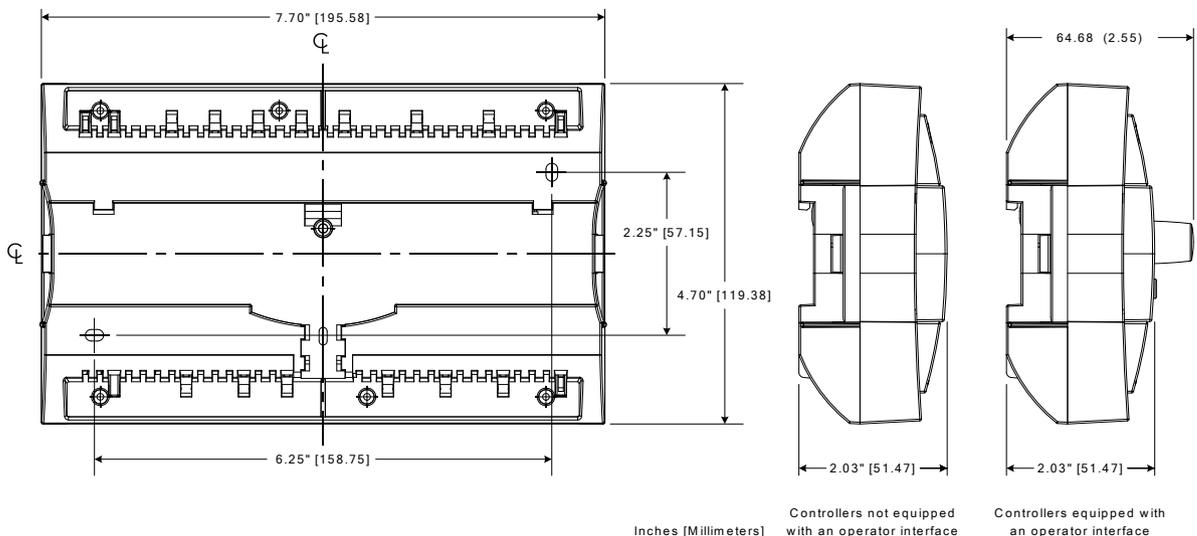

Shipping Weight:

- ECL-600 Series & ECx-400 Series

- ECL-600/ECL-610 ————— 1.17lbs (0.53 kg)
- ECL-650 ————— 1.28lbs (0.58 kg)

Enclosure Material¹ ————— FR/ABS

Enclosure Rating ————— Plastic housing, UL94-5VB flammability rating
Plenum rating per UL1995

Color ————— Black & blue casing & grey connectors

Installation ————— Direct DIN-rail mounting or wall mounting
through mounting holes (see figure above for hole positions)

1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

Environmental

Operating Temperature ————— 32°F to 122°F (0°C to 50°C)

Storage Temperature ————— -4°F to 122°F (-20°C to 50°C)

Relative Humidity ————— 0 to 90% Non-condensing

Standards and Regulations

CE:

- Emission ————— EN61000-6-3: 2007; A1:2011; Generic standards for residential, commercial and light-industrial environments
- Immunity ————— EN61000-6-1: 2007; Generic standards for residential, commercial and light-industrial environments

FCC ————— This device complies with FCC rules part 15, subpart B, class B

UL Listed (CDN & US) ————— UL916 Energy management equipment

CEC Appliance Database ————— Appliance Efficiency Program¹

1. California Energy Commission's Appliance Efficiency Program: The manufacturer has certified this product to the California Energy Commission in accordance with California law.



ECL-650 Display

Display Type ————— Backlit-color LCD

Display Resolution ————— 400 W x 240 H pixels (WQVGA)

Effective Viewing Area (W × H) ————— 2.4 × 1.4" (61.2 × 36.7mm)
2.8" (71mm) diagonal

Menu Navigation ————— Jog dial turn, select navigation with Exit button

Specifications - Universal Inputs (UI)

General

Input Type ————— Universal; software configurable
Input Resolution ————— 16-bit analog / digital converter
Power Supply Output ————— 15VDC; maximum 320mA

Contact

Type ————— Dry contact

Counter

UI1 to UI4:

Type ————— SO output compatible
Maximum Frequency ————— 50Hz maximum,
Minimum Duty Cycle ————— 10milliseconds On / 10milliseconds Off

UI5 to UI10:

Type ————— Dry contact
Maximum Frequency ————— 1Hz maximum,
Minimum Duty Cycle ————— 500milliseconds On / 500milliseconds Off

0 to 10VDC

Range ————— 0 to 10VDC (40k Ω input impedance)

0 to 5VDC

Range ————— 0 to 5VDC (high input impedance)

0 to 20mA

Range ————— 0 to 20mA
————— 249 Ω jumper configurable internal resistor

Resistance/Thermistor

Range ————— 0 to 350 K Ω

Supported Thermistor Types ————— Any that operate in this range

Pre-configured Temperature Sensor Types:

- Thermistor ————— 10K Ω Type 2, 3 (10K Ω @ 77°F; 25°C)
- Platinum ————— Pt1000 (1K Ω @ 32°F; 0°C)
- Nickel ————— RTD Ni1000 (1K Ω @ 32°F; 0°C)
————— RTD Ni1000 (1K Ω @ 69.8°F; 21°C)

Specifications - Universal Outputs (UO)

General

Output Type	Universal; software configurable
Output Resolution	10-bit digital to analog Converter
Output Protection	Built-in snubbing diode to protect against back-EMF, for example when used with a 12VDC relay Output is internally protected against short circuits
Load Resistance	Minimum 200 Ω for 0-10VDC and 0-12VDC outputs Maximum 500 Ω for 0-20mA output
Auto-reset fuse	Provides 24VAC over voltage protection

0 or 12VDC (On/Off)

Range	0 or 12VDC
Source Current	Maximum 60 mA at 12VDC (minimum load resistance 200 Ω)

PWM

Range	Adjustable period from 2 to 65seconds
Thermal Actuator Management	Adjustable warm up and cool down time

Floating

Minimum Pulse On/Off Time	500milliseconds
Drive Time Period	Adjustable

0 to 10VDC

Voltage Range	0 to 10VDC linear
Source Current	Maximum 60 mA at 10VDC (minimum load resistance 200 Ω)

0 to 20mA

Range	0 to 20mA
Type	Current source (jumper configurable)

HOA

Hand-Off-Auto switch	When equipped Supervision allows control logic to read the current HOA switch and potentiometer settings
Threshold	Configurable
Potentiometer Voltage Range	0 to 12.5VDC

Product Specifications- ECx-400 Series

Power Supply Input

Voltage Range _____ 24VAC/DC; $\pm 15\%$; Class 2

Frequency Range _____ 50/60Hz

Overcurrent Protection _____ Field replaceable fuse

Fuse Type _____ 3.0A

Power Consumption:

ECx-400/ECx-410 _____ 22 VA typical plus all external loads, 50 VA max.

ECx-420 _____ 10 VA typical, 16 VA max.

Communication

Communication Bus _____ RS-485

Baud Rates _____ 38 400 bps

Addressing _____ Dip Switch

Hardware

Processor _____ STM32 (ARM Cortex™ M3) MCU, 32 bit

CPU Speed _____ 64 MHz

Memory _____ 64 kB Non-volatile Flash (applications and storage)

_____ 20 kB RAM


Status Indicator _____ Green LEDs: power status & LAN Tx

_____ Orange LEDs: controller status & LAN Rx

Mechanical

Dimensions:

With Screws _____ 4.7 × 7.7 × 2.03" (119.38 × 195.58 × 51.47mm)

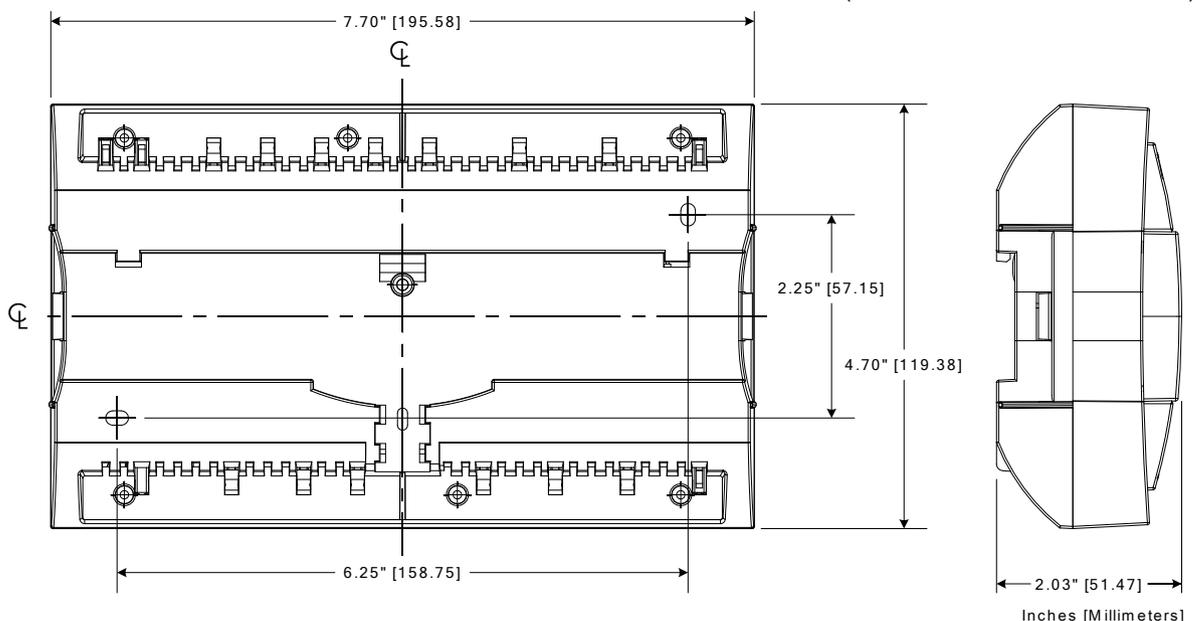

Shipping Weight _____ 1.17lbs (0.53kg)
Enclosure Material¹ _____ FR/ABS
Enclosure Rating _____ Plastic housing, UL94-5VB flammability rating
Plenum rating per UL1995
Color _____ Black & blue casing & grey connectors
Installation _____ Direct DIN-rail mounting or wall mounting
through mounting holes (see figure above for hole positions)

1. All materials and manufacturing processes comply with the RoHS directive and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive

Environmental

Operating Temperature _____ 32°F to 122°F (0°C to 50°C)
Storage Temperature _____ -4°F to 122°F (-20°C to 50°C)
Relative Humidity _____ 0 to 90% Non-condensing

Standards and Regulations

CE:

- Emission _____ EN61000-6-3: 2007; A1:2011; Generic standards for residential, commercial and light-industrial environments
- Immunity _____ EN61000-6-1: 2007; Generic standards for residential, commercial and light-industrial environments

FCC _____ This device complies with FCC rules part 15, subpart B, class B

UL Listed (CDN & US) _____ UL916 Energy management equipment



Specifications - Universal Inputs (UI)

General

Input Type _____ Universal; software configurable
Input Resolution _____ 16-bit analog / digital converter
Power Supply Output _____ 15VDC; maximum 240mA

Contact

Type _____ Dry contact

Counter

Type _____ Dry contact
Maximum Frequency _____ 1Hz maximum,
Minimum Duty Cycle _____ 500milliseconds On / 500milliseconds Off

0 to 10VDC

Range _____ 0 to 10VDC (40kΩ input impedance)

0 to 5VDC

Range _____ 0 to 5VDC (high input impedance)

0 to 20mA

Range _____ 0 to 20mA



249Ω external resistor wired in parallel

Resistance/Thermistor

Range 0 to 350 KΩ

Supported Thermistor Types Any that operate in this range

Pre-configured Temperature Sensor Types:

- Thermistor 10KΩ Type 2, 3 (10KΩ @ 77°F; 25°C)
 - Platinum Pt1000 (1KΩ @ 32°F; 0°C)
 - Nickel RTD Ni1000 (1KΩ @ 32°F; 0°C)
-
- RTD Ni1000 (1KΩ @ 69.8°F; 21°C)

Specifications - Universal Outputs (UO)

General

Output Type _____ Universal; software configurable
Output Resolution _____ 10-bit digital to analog Converter
Output Protection _____ Built-in snubbing diode to protect against back-EMF,
for example when used with a 12VDC relay
Output is internally protected against short circuits
Load Resistance _____ Minimum 200 Ω for 0-10VDC and 0-12VDC outputs
_____ Maximum 500 Ω for 0-20mA output
Auto-reset fuse _____ Provides 24VAC over voltage protection

0 or 12VDC (On/Off)

Range _____ 0 or 12VDC
Source Current _____ Maximum 60 mA at 12VDC (minimum load resistance 200 Ω)

PWM

Range _____ Adjustable period from 2 to 65seconds
Thermal Actuator Management _____ Adjustable warm up and cool down time

Floating

Minimum Pulse On/Off Time _____ 500milliseconds
Drive Time Period _____ Adjustable

0 to 10VDC

Voltage Range _____ 0 to 10VDC linear
Source Current _____ Maximum 60 mA at 10VDC (minimum load resistance 200 Ω)

0 to 20mA

Range _____ 0 to 20mA
Type _____ Current source (jumper configurable)

HOA

Hand-Off-Auto switch _____ When equipped
_____ Supervision allows control logic to read the current
HOA switch and potentiometer settings
Threshold _____ Configurable
Potentiometer Voltage Range _____ 0 to 12.5VDC

Specifications subject to change without notice.

Distech Controls, the Distech Controls logo, Innovative Solutions for Greener Buildings, EC-Net, ECO-Vue, Allure, and Open-To-Wireless are trademarks of Distech Controls Inc.; LonWorks, LON, and LNS are registered trademarks of Echelon Corporation; BACnet is a registered trademark of ASHRAE; BTL is a registered trademark of the BACnet Manufacturers Association; Niagara^{AX}Framework is a registered trademark of Tridium, Inc.; EnOcean is a registered trademark of EnOcean GmbH. All other trademarks are property of their respective owners.

©, Distech Controls Inc., 2011 - 2016. All rights reserved.

